

FBA Series

Chip Ferrite Bead SMD Type
Size 0805




FEATURES

- E} • μ $\ddot{Y}$ v • } o μ $\ddot{Y}$ } v (} $\mathbb{E}$ P v $\mathbb{E}$ o • } P v o
- s $\mathbb{E}$ } } μ • ($\mathbb{E}$ < μ v ζ Z $\mathbb{E}$ š $\mathbb{E}$ } • $\ddot{Y}$ • Á } š Z î u
- } + $\mathbb{E}$ v š (š μ $\mathbb{E}$ • (} $\mathbb{E}$ } μ v š $\mathbb{E}$ u • μ $\mathbb{E}$ • P
- š Z } v P ($\mathbb{E}$ } u P v $\mathbb{E}$ o • } P v o • š } Z } P Z r • %
- r $\mathbb{Y}$ î î î < μ o }.
- K % $\mathbb{E}$ $\ddot{Y}$ v P š u % $\mathbb{E}$ š μ $\mathbb{E}$ W r ñ ñ $\mathbb{E}$ š } = í ñ î $\mathbb{E}$
-


APPLICATION

-

Dimensions: [mm]

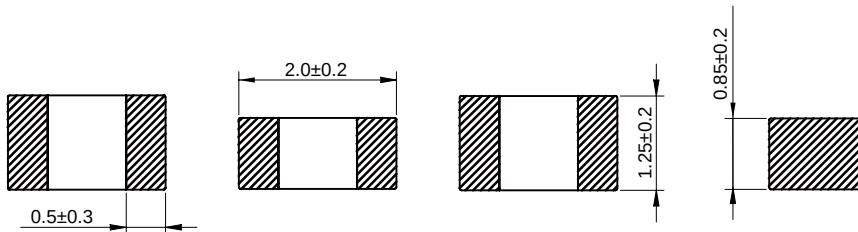



Land Pattern: [mm]



Electrical Properties:

	Impedance @ 100MHz (Ω)	DC Resistance Max. (Ω)	Temperature Rise Current Max. (mA)
& î ð î ñ r í î r ð î í Z	í í		
& î ð î ñ r í ó î r ð î í Z	í ó		
& î ð î ñ r í ð î r ð î í Z	î ð		
& î ð î ñ r î î î r ð î í Z	î î		
& î ð î ñ r ð î î r ð î í Z	ð î		
& î ð î ñ r ð î î r ð î í Z	ð î		
& î ð î ñ r í í r ð î í Z	í î î		
& î ð î ñ r í ñ í r ð î í Z	í ñ î		
& î ð î ñ r î î í r ó ñ í Z	î î î		
& î ð î ñ r î î í r ó í Z	î î î		
& î ð î ñ r ð ó í r ó í Z	ð ó î		
& î ð î ñ r ð î í r ñ í Z	ð î î		
& î ð î ñ r í î î r ð î í Z	í î î î		
& î ð î ñ r í î î r ñ í Z	í î î î		
& î ð î ñ r í ñ î î r ñ í Z	í ñ î î		
& î ð î ñ r î î î r î î î Z	î î î î		
& î ð î ñ r î î î r ð î í Z	î î î î		


Typical Electrical Characteristics:

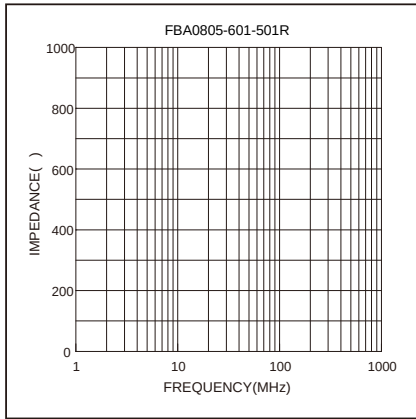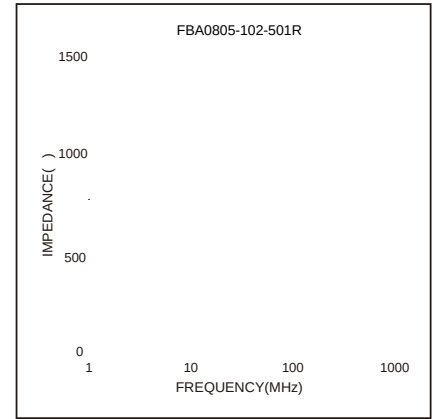

Soldering Reflow:


Packaging Information:

Tape Dimension :

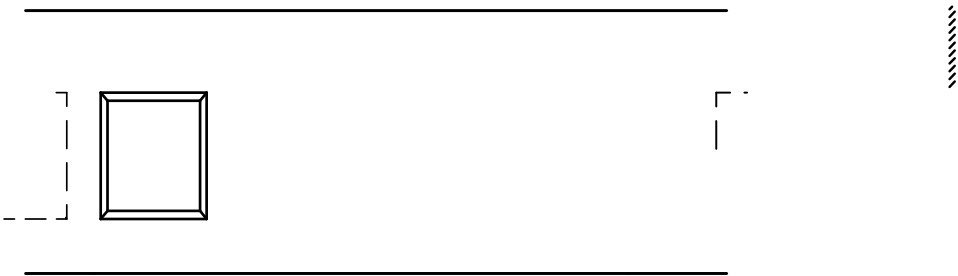


Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
0805	1.30±0.05	2.10±0.05	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.3	0.95±0.05	1.75±0.1	0.95±0.05

Peel force of top cover tape:

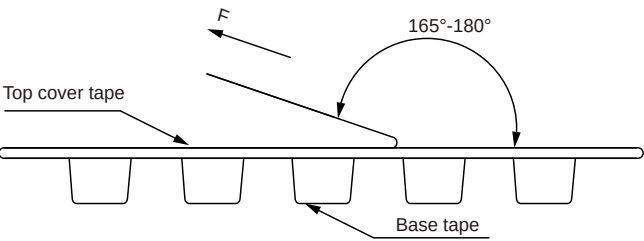

The peel force of top cover tape shall be between 0.14 to 0.58 N

Reel Dimension: [mm]

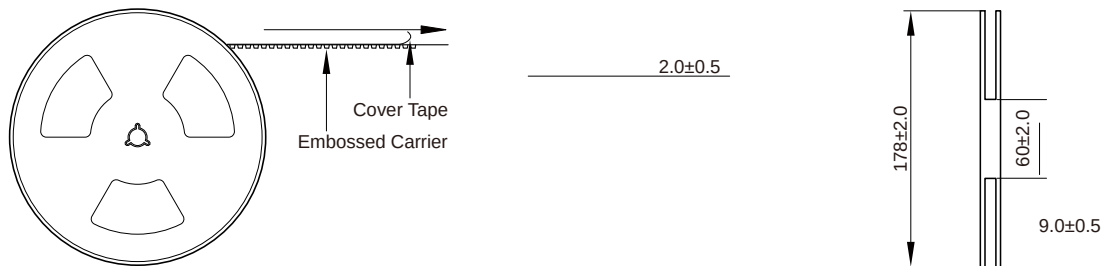

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.